

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 October 2003 (23.10.2003)


PCT

(10) International Publication Number
WO 03/086157 A1

- (51) International Patent Classification⁷: **A47J 31/44**, 31/46
- (21) International Application Number: **PCT/IT02/00249**
- (22) International Filing Date: **18 April 2002 (18.04.2002)**
- (25) Filing Language: **Italian**
- (26) Publication Language: **English**
- (71) Applicant (for all designated States except US): **TUT-TOESPRESSO S.P.A.** [IT/IT]; Via Trieste, 49, I-21042 Caronno Petrusella (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MAJER DOGLIONI**, Luca [IT/IT]; Via Vincenzo Monti, 57, I-20145 Milan (IT).
- (74) Agent: **VALENTINI, Giuliano**; Marietti, Gislon e Trupiano S.r.l., Via Larga, 16, I-20122 Milan (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report

[Continued on next page]

(54) Title: **MACHINE FOR PREPARING BEVERAGES**

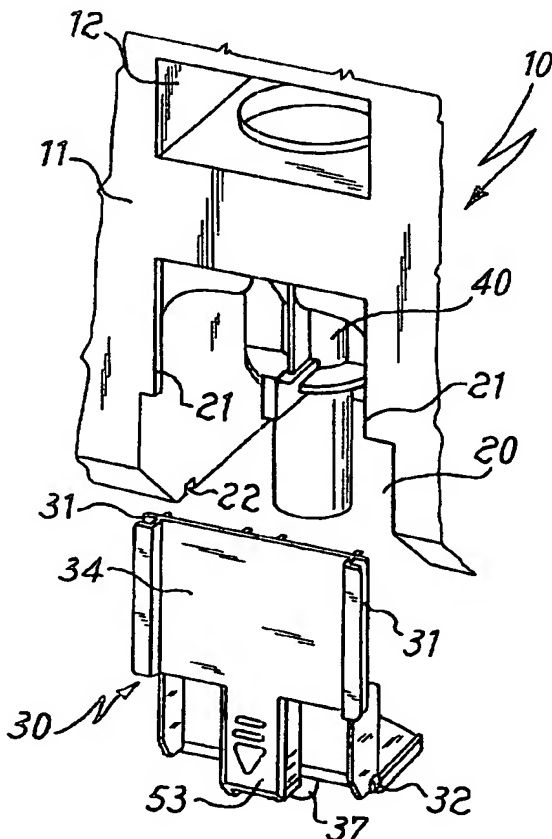

(57) Abstract: It is disclosed a machine (10) for the preparation of beverages, of the type comprising at least one dispensing unit that includes a removable collecting device (40). The access to the latter is through a window (20) obtained in the envelope, and at least one covering element (30) is provided that comprises sliding guide means (31) complementary to those (21) associated to the access win dow (20).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Title: MACHINE FOR PREPARING BEVERAGES**Technical Field of the Invention**

The present invention relates to a machine for the preparation of beverages, for instance a machine suitable for the preparation of a beverage starting from disposable containers, such as cartridges or the like.

Background of the Invention

Generally, in the machines of the known art of this type, at least one dispensing unit is present that is housed in the inside of an envelope. In particular, the dispensing unit comprises at least one collecting unit which can be removed for the necessary cleaning operations. The mounting of the collecting device in the dispensing unit is generally realized by means of a bayonet-coupling.

The same collecting device has in the lower part a dispensing duct wherefrom the beverage prepared comes out to be in its turn conveyed through a duct that ends in the dispensing spout. The latter is obtained in an underlying covering plate that can be removed to allow the access to, and the removal of, the collecting device.

As is obvious, the access to the collecting device in the mounting and removal operations is poorly practical and particularly tiresome. The collecting device, in fact, can be reached only by operating manually from the bottom of the dispensing duct. Besides being tiresome from the point of view of the operations necessary to place the collecting device in a bayonet-coupling system, it is worth stressing that there may arise health problems, as the "clean" collecting device is re-positioned by operating with a hand on the dispensing duct of the collecting device.

A general object of the present invention is to provide a machine for dispensing beverages such as to render easier and safer for health the frequent operations which the collecting device is submitted to.

A particular object of the present invention is to provide a machine for dispensing beverages such as to facilitate the access to the collecting device.

Another particular object of the present invention is to provide a machine for dispensing beverages such as to facilitate the mounting and removal of the collecting device.

Summary of the invention

5 These objects are achieved by the present invention that relates to a machine for the preparation of beverages, of the type comprising at least one dispensing unit housed in the inside of an envelope, said dispensing unit comprising at least one removable collecting device whose access is through at least one access window obtained in the envelope, and at least one
10 removable covering element to occlude or selectively free the access window, characterized in that the access window faces the collecting device, and that the at least one covering element and the at least one access window comprise sliding guide means that are complementary to each other.

15 In this way, it is possible to have access to the dispensing unit from the front and to operate directly on the bayonet-coupling by which the collecting device is held.

20 The sliding guide means are oriented according to a sliding direction substantially parallel to the axis of the collecting device. Hence, one only vertical movement suffices to remove the covering element from the rest of the envelope.

 Suitably, locking means are provided to keep the covering element in the access window occluding position, such as for instance elastic snap-locking means.

25 Preferably, the collecting device comprises at least one protruding handling portion to facilitate the positioning and the removal of said collecting device with respect to the dispensing unit. Besides facilitating the engagement and disengagement of the bayonet-coupling, this characteristic is more advantageous also from the point of view of health, as it allows the manipulation of the collecting device without touching the zones concerned
30 by the passage of the dispensed beverages.

 Advantageously, the covering element comprises guide means that

loosely engage the protruding handling portion when the collecting device is correctly mounted. In this manner, a key-mechanism is obtained that prevents the access window from closing if the collecting device is not correctly mounted in the bayonet-coupling.

5 **Brief Description of the Drawings**

Further advantages and characteristics of the present invention will be clearer thanks to the following description wherein reference is made to the attached drawings, wherein:

- 10 - Figure 1 shows a portion of a machine for beverage dispensing according to the present invention, in correspondence of the access window to the dispensing unit;
- Figure 2 is a perspective view of a covering element for a machine according to the present invention;
- Figure 3 is a perspective view of a collecting device for a machine
15 according to the present invention;
- Figure 4 is another perspective view of the covering element of Figure 2; and
- Figure 5 is a view that shows the coupling between the collecting device of Figure 3 and the covering element of Figure 4.

20 **Modes for carrying out the Invention**

Figure 1 shows a portion of a machine for the preparation of beverages 10 in correspondence of window 20 allowing the access to the dispensing unit. For the sake of representation clearness, some details have been omitted, for instance the bayonet-coupling wherein the collecting device
25 40 engages.

In the represented embodiment, envelope 11 of machine 10 also comprises an opening 12 allowing the insertion and the removal of a disposable cartridge (not shown) containing a preparation for the beverage to be dispensed.

30 In correspondence of the access window 20, envelope 11 comprises edge portions 21 placed on the opposite sides of the window, which are

provided for engaging in a sliding manner the inside of guide grooves 31 obtained on the opposite sides of at least a first wall 34 of a covering element 30.

5 The restraining of the covering element 30 in the occluding position of the access window 20 is realized, for instance, by locking elastic snap-means. In the embodiment shown herein, the locking elastic snap-means are realized, for instance, with one or more protrusions 32 obtained on elastically deformable arms 33, intended for engaging in special seats 22 obtained in a suitable position in the inside of machine 10.

10 The covering element 30, shown with more details in Figures 2 and 4, which, for instance, may be realized from plastic material, comprises in particular a first substantially flat wall portion 34, parallel to the vertical axis of the collecting device 40 when the covering element 30 is slidably engaged in the access window 20.

15 On the external front part of the covering element 30, below the first portion of wall 34, a handling portion 35 is obtained that is provided, for instance, with protruding ribs 54, to facilitate the manual operations of positioning and removing the covering element 30.

The covering element 30 also comprises a second wall portion 35
20 substantially perpendicular to the first wall portion 34. In the embodiment shown herein, the second wall portion 35 is integral with the first wall portion 34, but it is also possible to provide the wall portions as separate parts by providing means for connecting the separate parts in an articulated manner, or means allowing also the removable positioning of the part comprising the
25 second wall portion 35.

The covering element 30 also comprises a tubular portion 36 having a through-hole whose axis is perpendicular to the second wall portion 35. The tubular portion 36 is composed of a duct that ends in a dispensing spout 37
30 wherefrom the prepared beverage comes out to be collected in a cup or a glass already placed under said spout.

The tubular portion 36 has an internal diameter greater than the

external diameter of the dispensing duct 46 (Figure 3) of the collecting device 40, in such a manner that, when the covering element 30 is in the position occluding the access window 20, the dispensing duct 46 is housed at least partly in the inside of the tubular portion 36.

5 The collecting device 40, shown with more details in Figure 3, is of the type intended for being engaged in a bayonet-coupling. A first protruding arm 41 of the bayonet coupling is therefore provided, while in a diametrically opposed position the second arm 42 of the bayonet coupling extends to form a protruding handling portion 45 that allows the manipulation of the collecting
10 device 40 in an easier and health-safer manner.

Figure 5 shows the assembly composed of a covering element 30 and a collecting device 40 in a mutual coupling position, i.e. in the state where the covering element is in the position that occludes the access window 20. As can be observed, the covering element 30 advantageously comprises
15 guide means, consisting for instance of a couple of flanges 38 that loosely engage the protruding handling portion 45 in such a manner as to realize a key-mechanism that prevents the covering element 30 from closing if the collecting device is not correctly mounted in the bayonet-coupling.

CLAIMS

1. A machine for the preparation of beverages of the type comprising at least one dispensing unit housed in the inside of an envelope, said dispensing unit comprising at least one removable collecting device whose
5 access is through at least one access window obtained in the envelope, and at least one removable covering element to occlude or selectively free said access window, characterized in that the access window faces the collecting device, and that said at least one covering element and said at least one access window comprise sliding guide means that are complementary to
10 each other.
2. A machine according to claim 1, wherein said at least one removable covering element and said at least one access window comprise locking means for holding said covering element in the occluding position of said access window.
- 15 3. A machine according to claim 2, wherein said locking means are elastic snap-locking means.
4. A machine according to claim 1, wherein said at least one removable covering element comprises at least one substantially flat first wall portion, said at least one substantially flat first wall portion being parallel to the
20 vertical axis of said collecting device when said covering element is slidingly engaged in said access window.
5. A machine according to claim 4, wherein said sliding guide means consist of at least a couple of grooves obtained on the opposite sides of said at least one first wall portion.
- 25 6. A machine according to claim 1, wherein said at least one covering element comprises a second wall portion substantially perpendicular to a first wall portion.
7. A machine according to claim 6, wherein said at least one covering element further comprises at least one tubular portion having a through-hole
30 whose axis is perpendicular to said at least one second wall portion and suitable to house in its inside at least part of the beverage dispensing duct of

said collecting device.

8. A machine according to claim 1, wherein said collecting device is removably mounted in said dispensing unit by means of a bayonet-coupling, and wherein said collecting device comprises at least one protruding
5 handling portion, to facilitate the positioning and the removal of said collecting device with respect to said dispensing unit.

9. A machine according to claim 8, wherein said at least one covering element comprises guide means that loosely engage said at least one protruding handling portion when said collecting device is correctly mounted.

10 10. A machine according to claim 1, wherein said sliding guide means complementary to each other are oriented according to a sliding direction substantially parallel to the axis of said collecting device.

1/E

Fig. 1


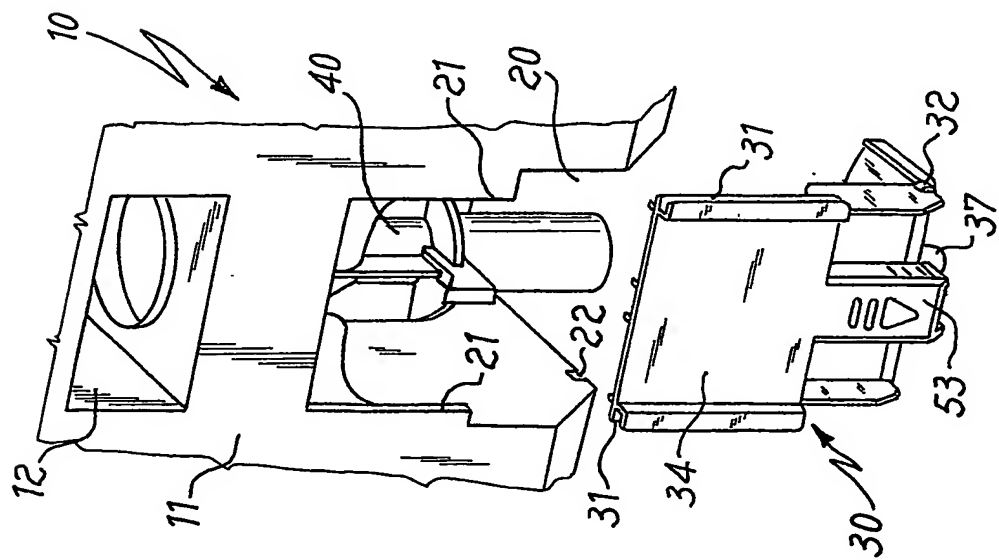


Fig. 2

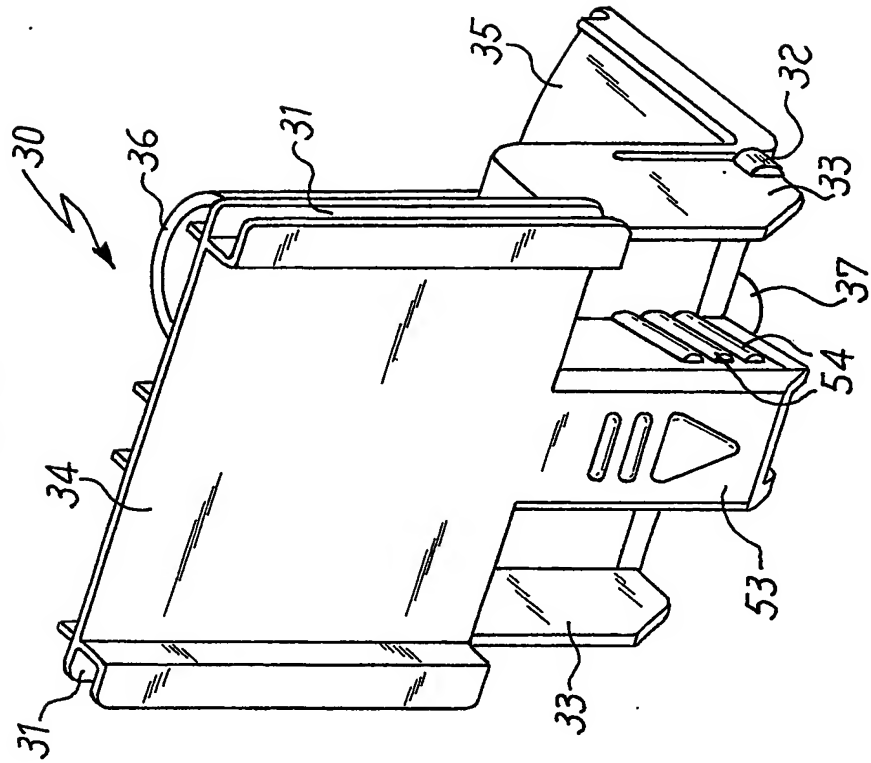

2/3

Fig. 3

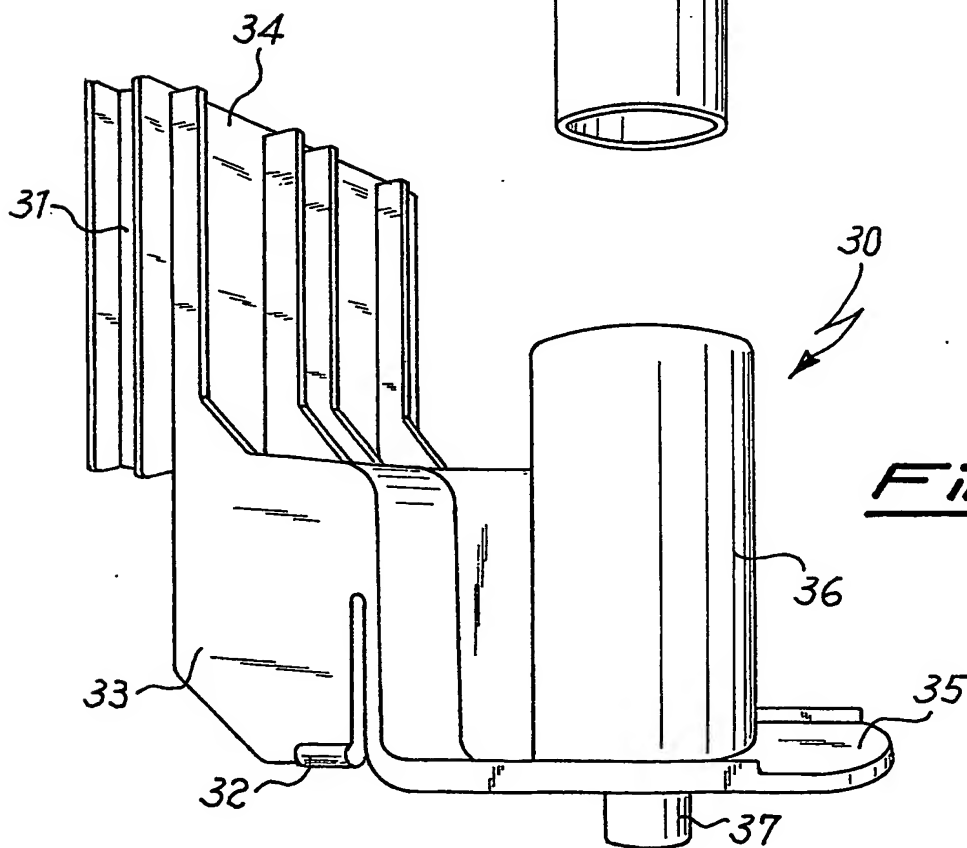
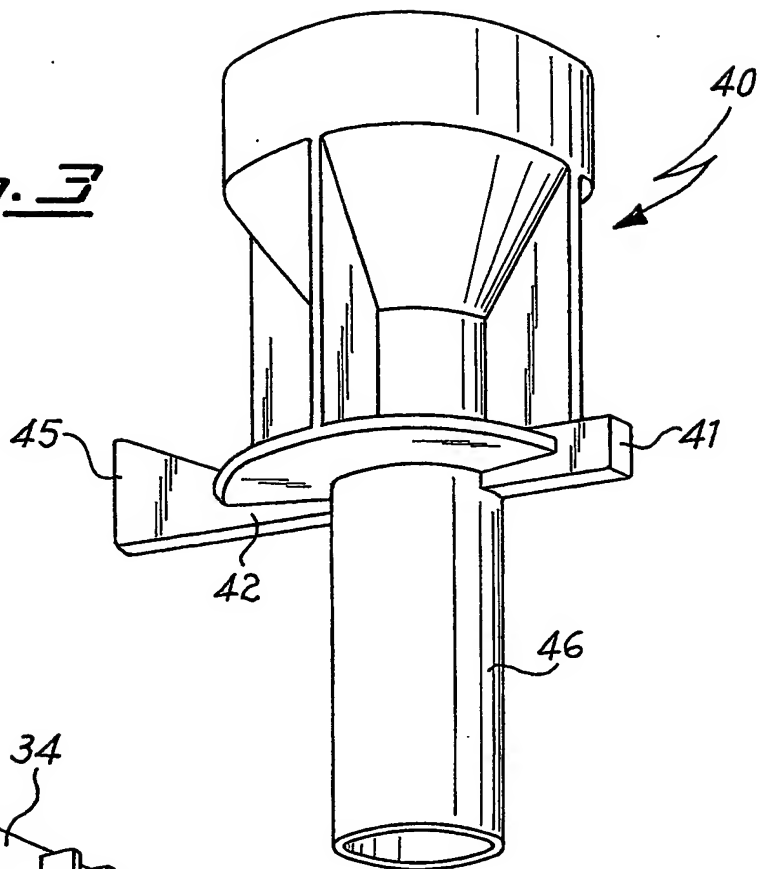
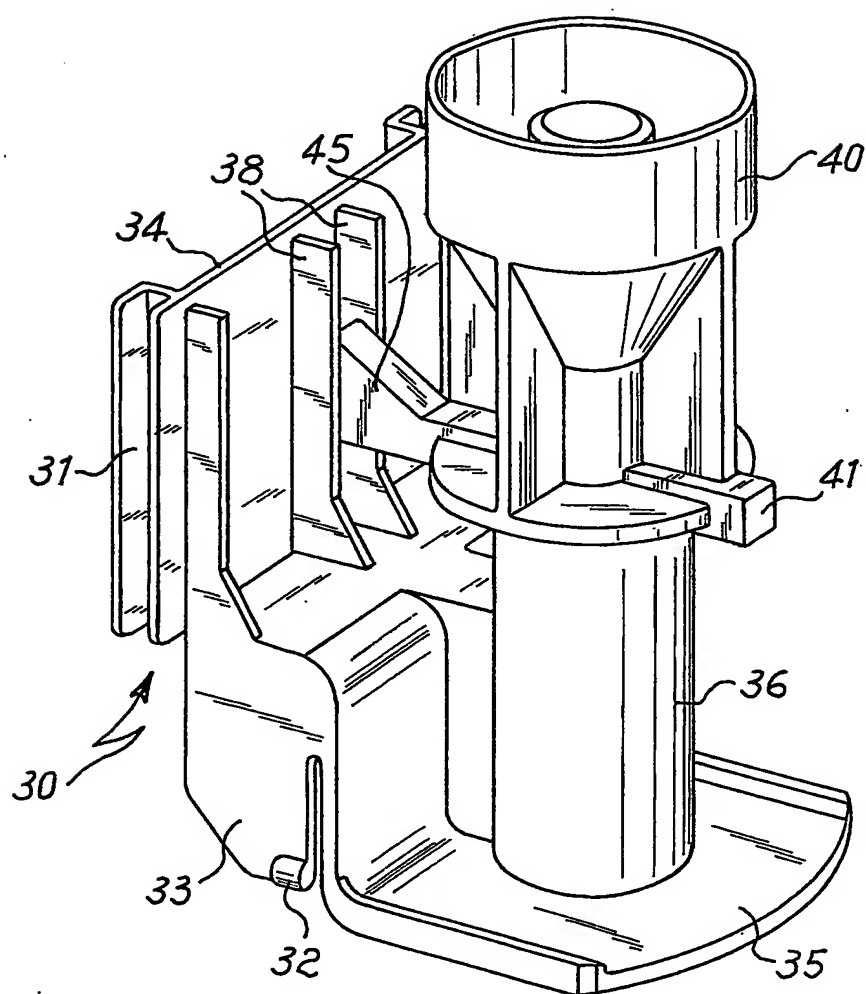


Fig. 4

E/E

Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 02/00249

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 A47J31/44 A47J31/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 A47J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	IT 1 230 524 B (FAEMA BARCELLONA S A) 25 October 1991 (1991-10-25) page 2-3 page 6 figures 1,2	1-5
A	US 5 896 806 A (DAL TIO NELLO) 27 April 1999 (1999-04-27)	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

25 October 2002

Date of mailing of the international search report

15/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Novelli, B

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/IT 02/00249

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
IT 1230524	B	25-10-1991	ES 2009494 A6	01-10-1989
			ES 2013330 A6	01-05-1990
			PT 88770 A ,B	31-07-1989
			FR 2621804 A1	21-04-1989
US 5896806	A	27-04-1999	IT PN950056 A1	06-05-1997
			AU 7496596 A	29-05-1997
			EP 0802755 A1	29-10-1997
			JP 10512182 T	24-11-1998
			WO 9717006 A1	15-05-1997